

MONUMENT RECORD
State of Indiana - County of Monroe

Section: 30

Township: 7 North



Range: 1 East

Corner ID: Polk C-19

Monument Description & Remarks: Sandstone with "X", length 0.75ft, width 0.45ft, height 0.40ft. Survey Sign 5ft above ground at pt. B.

References On File: Legal Survey Book 2 page no. 217-218 (1883); Eric Deckard survey, Terre Haute Realty Property (2005), on file in Recorder Office (In# 2005024524).

RECOVERY TIE DRAWING
Field Book 37 Page No. 63

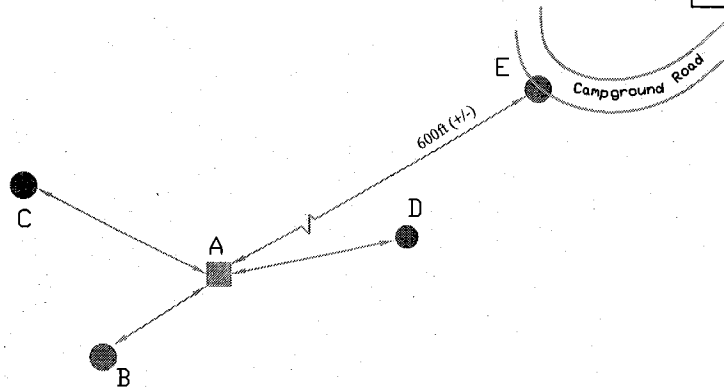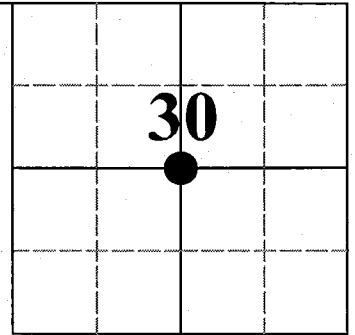

A - Sandstone

B - S 61° W 10.30' Survey Sign
on 5" Black Oak

C - N 62° W 24.50' to MAG nail
in 15" Black Oak

D - N 60° E 21.02' to MAG nail
in 13" White Oak

E - N 50° E 600' (+/-) to
Campground Road




Not To Scale
Compass Bearing Magnetic North

I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of section 36-2-12-11 of the Indiana Code; and the above data is given under my hand and seal this 18th day of January, 2006.

Administered by the Monroe County Surveyor Review Board

Date: 1/9/2007 DB

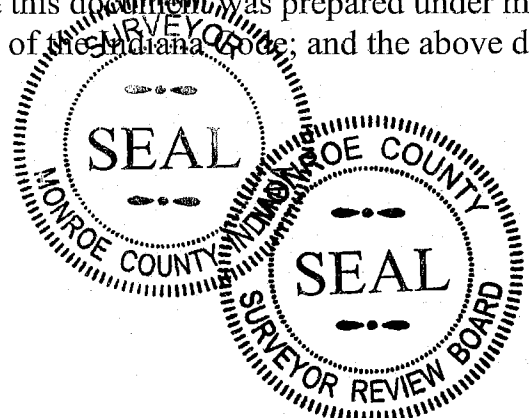

Index: T-3 Corner: C1/4 **LAND CORNER RECORD**

Twntshp: 7N Range: 1E Section: 30 2nd P.M. County: Monroe

POIK C19
State of Indiana
Hoosier National Forest

EXISTING SURVEYS

Original Government Survey

Year Surveyed:		By:	
Original Monument:			
Species	Diameter	Bearing	Distance

Original Survey Evidence Found

Date of Search:		By:	
Monument Found:			
Species	Diameter	Bearing	Distance

Subsequent Corner Restoration

Where Filed or Recorded:	Monroe County Surveyors Office		
Book:	Page: 217	Date:	5/1873
Monument Set:	Not stated		

Evidence of Subsequent Corner Restoration Found

Year Searched:	2/3/2010	By:	B. Stone
Monument Found	5" x 9" triangular shaped stone, standing 5" above ground with a shallow + and lightly scribed: ½ M		

Species	Diameter	Bearing	Distance
W. Oak	14"	S 79 1/2°W	21.5 Links
W. Oak	12"	N 31°W	25 Links

Species	Diameter	Bearing	Distance

OTHER EVIDENCE

Describe corner loc. Relative to nearby features & dir. To corner location; note fences, roads, etc.	Photo of Monument
The stone is located on a southeast slope 49 feet west of a northeast-to southwest flowing drainage. I can see my truck parked at the loop on the west end of Southern Point Campground Road at N 43°E approximately 600 feet. A 4.5" x 6.5" yellow Monroe County Survey Marker tag is on a Scarlet Oak at S 59°W. Lake Monroe can be seen at S 77°W. The coordinates shown at the bottom were collected using a resource grade Trimble GEO XT unit. The horizontal precision was 2.6 feet.	

PERPETUATION RECORD

Photographs of the corner and vicinity:
 

Corner Diagram	Accessories: Describe new BTs & witness objects established to perpetuate existing evidence.			
				
	Corner Recordation:		Certificate Prepared:	
	Filed and Recorded in County records:		Date:	
	Book:		Page:	
	Indiana State Plane Coordinates:	N. 1371761.278	E. 3132253.965	
Section: 30	Edited By:	Robert J. Stone	Date Created:	2/16/2010